

Chapter 4

Data Abstraction: The Walls

© 2011 Pearson Addison-Wesley. All rights reserved

4-1

```

bubbleSort(int[] a) {
    int last = a.length - 1;
    while (last > 0) {
        int i = 0;
        while (i < last) {
            if (a[i] > a[i+1]) {
                int temp = a[i];
                a[i] = a[i+1];
                a[i+1] = temp;
            }
            i++;
        }
        last = last - 1;
    }
}

```

Handwritten annotations in red:


- Arrow from `last > 0` to `int i = 0` with text: `int i = 0; LS = 0;`
- Arrow from `a[i] > a[i+1]` to `int temp = a[i];` with text: `LS = i;`
- Arrow from `last = last - 1;` to `last` with text: `LAST = LS;`

```

Selection Sort (int[] a) {
    int cur, low, min;

    for (cur = 0; cur < a.length; cur++) {
        min = cur;
        for (int j = cur + 1; j < a.length; j++) {
            if (a[j] < a[min]) {
                min = j;
            }
        }
        if (min != cur) {
            int t = a[min];
            a[min] = a[cur];
            a[cur] = t;
        }
    }
}

```

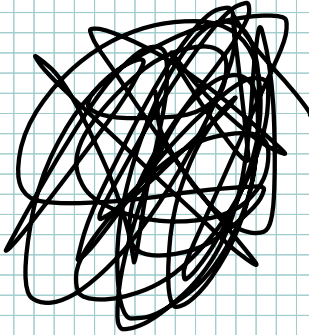

Abstract Data Types

- Modularity
 - Keeps the complexity of a large program manageable by systematically controlling the interaction of its components
 - Isolates errors
 - Eliminates redundancies
 - A modular program is
 - Easier to write
 - Easier to read
 - Easier to modify

Abstract Data Types

- Procedural abstraction
 - Separates the purpose and use of a module from its implementation
 - A module's specifications should
 - Detail how the module behaves
 - Identify details that can be hidden within the module
- Information hiding
 - Hides certain implementation details within a module
 - Makes these details inaccessible from outside the module

Abstract Data Types

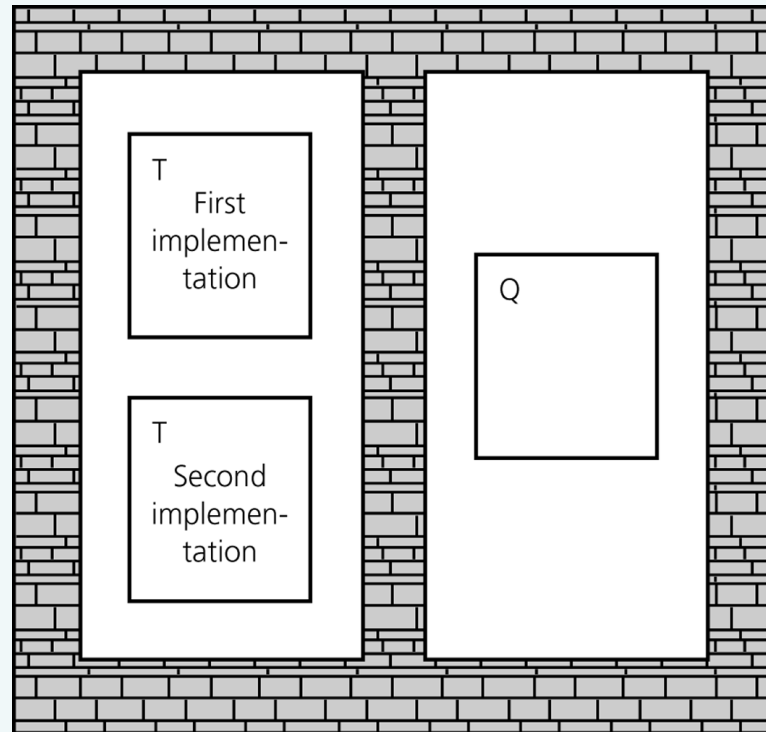


Figure 4-1

Isolated tasks: the implementation of task T does not affect task Q

© 2011 Pearson Addison-Wesley. All rights reserved

4-4

Abstract Data Types

- The isolation of modules is not total
 - Methods' specifications, or contracts, govern how they interact with each other

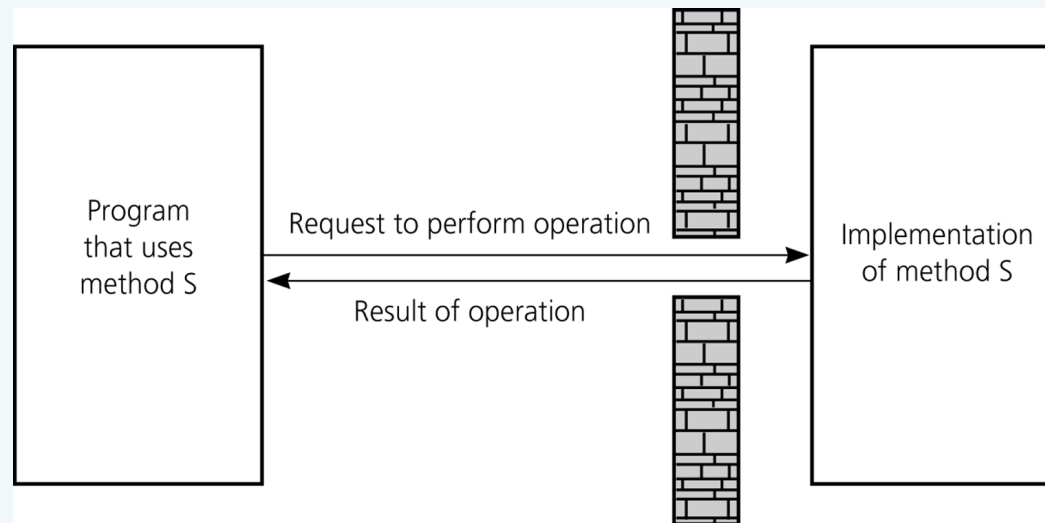


Figure 4-2

A slit in the wall

© 2011 Pearson Addison-Wesley. All rights reserved

4-5

Abstract Data Types

- Typical operations on data
 - Add data to a data collection
 - Remove data from a data collection
 - Ask questions about the data in a data collection
- Data abstraction
 - Asks you to think *what* you can do to a collection of data independently of *how* you do it
 - Allows you to develop each data structure in relative isolation from the rest of the solution
 - A natural extension of procedural abstraction

Abstract Data Types

- Abstract data type (ADT)
 - An ADT is composed of
 - A collection of data
 - A set of operations on that data
 - Specifications of an ADT indicate
 - What the ADT operations do, not how to implement them
 - Implementation of an ADT
 - Includes choosing a particular data structure

Abstract Data Types

- Data structure
 - A construct that is defined within a programming language to store a collection of data
 - Example: arrays
- ADTs and data structures are not the same
- Data abstraction
 - Results in a wall of ADT operations between data structures and the program that accesses the data within these data structures

Abstract Data Types

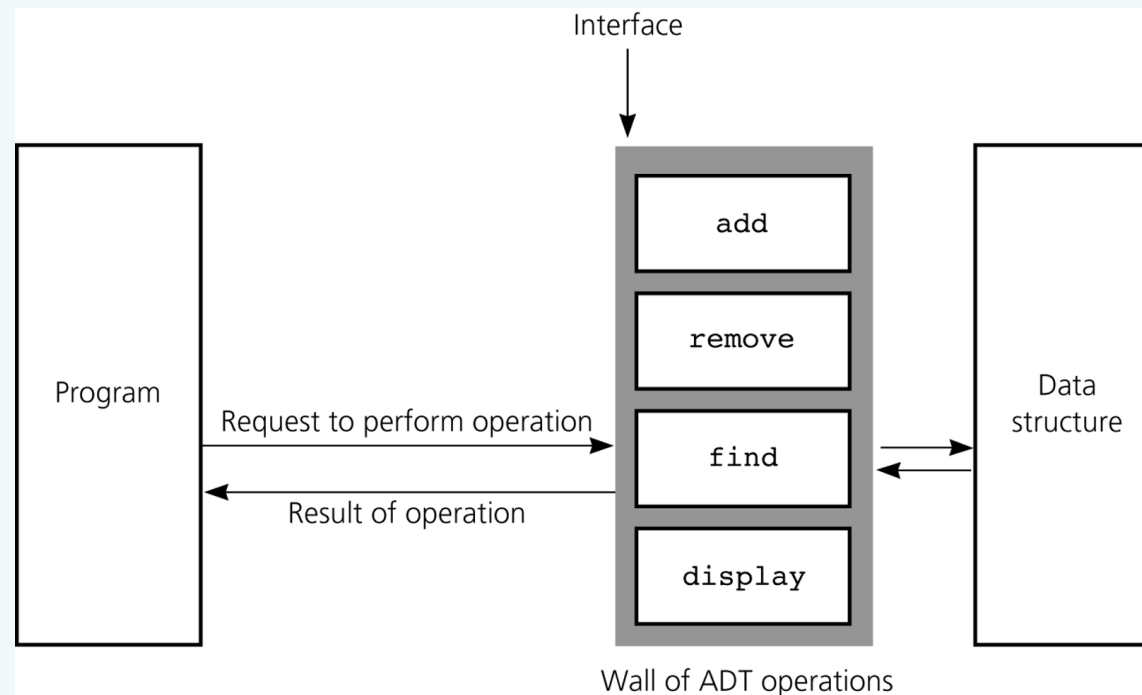


Figure 4-4

A wall of ADT operations isolates a data structure from the program that uses it

© 2011 Pearson Addison-Wesley. All rights reserved

4-9

Specifying ADTs

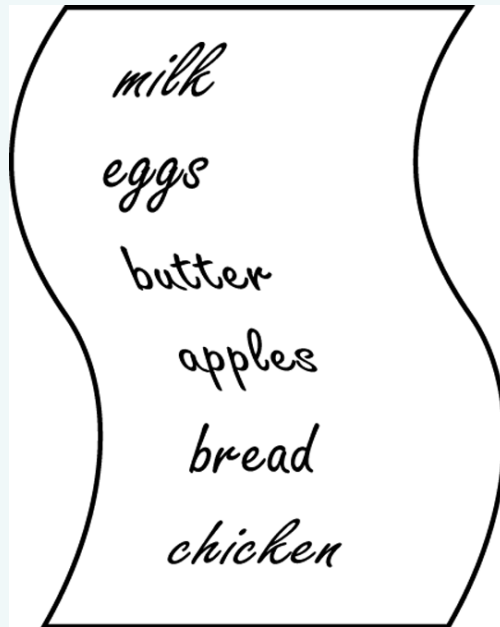


Figure 4-5

list A grocery

© 2011 Pearson Addison-Wesley. All rights reserved

- In a list
 - Except for the first and last items, each item has
 - A unique predecessor
 - A unique successor
 - Head or front
 - Does not have a predecessor
 - Tail or end
 - Does not have a successor

4-10

The ADT List

- ADT List operations
 - Create an empty list
 - Determine whether a list is empty
 - Determine the number of items in a list
 - Add an item at a given position in the list
 - Remove the item at a given position in the list
 - Remove all the items from the list
 - Retrieve (get) the item at a given position in the list
- Items are referenced by their position within the list

The ADT List

- Specifications of the ADT operations
 - Define the contract for the ADT list
 - Do not specify how to store the list or how to perform the operations
- ADT operations can be used in an application without the knowledge of how the operations will be implemented

The ADT List

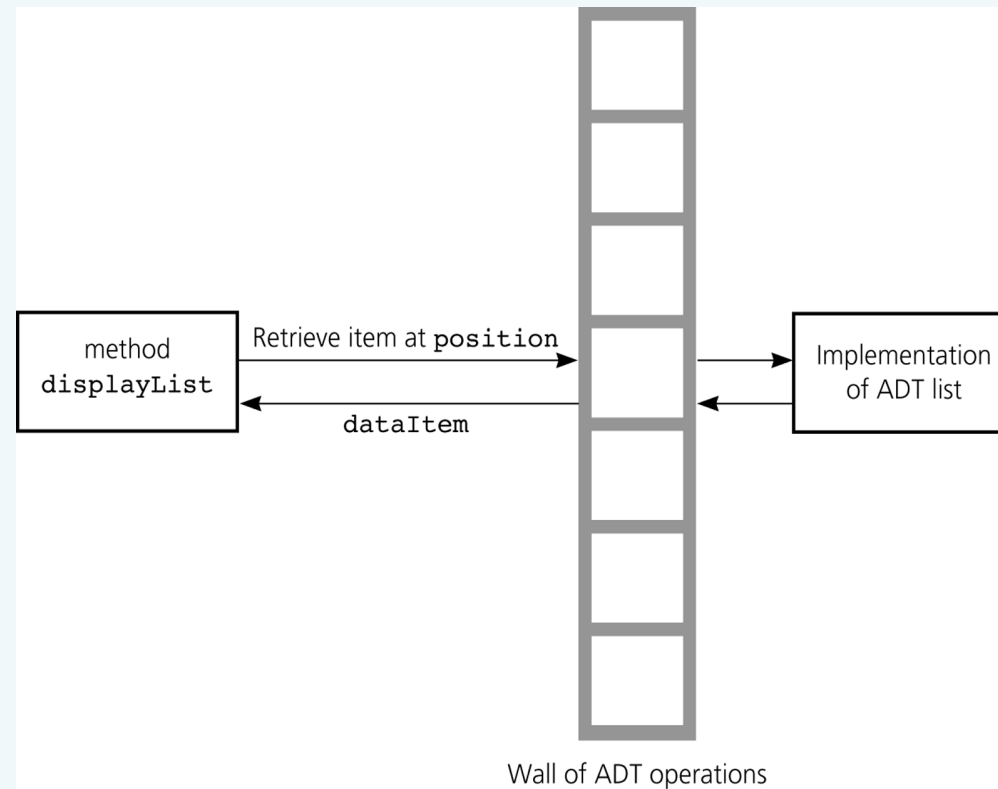


Figure 4-7

The wall between *displayList* and the implementation of the ADT list

© 2011 Pearson Addison-Wesley. All rights reserved

4-13

The ADT Sorted List

- The ADT sorted list
 - Maintains items in sorted order
 - Inserts and deletes items by their values, not their positions

Designing an ADT

- The design of an ADT should evolve naturally during the problem-solving process
- Questions to ask when designing an ADT
 - What data does a problem require?
 - What operations does a problem require?

Axioms (Optional)

- For complex abstract data types, the behavior of the operations must be specified using axioms
 - Axiom: A mathematical rule

Axioms (Optional)

- Axioms for the ADT List
 - $(\text{aList.createList()}).\text{size}() = 0$
 - $(\text{aList.add}(i, x)).\text{size}() = \text{aList.size}() + 1$
 - $(\text{aList.remove}(i)).\text{size}() = \text{aList.size}() - 1$
 - $(\text{aList.createList()}).\text{isEmpty}() = \text{true}$
 - $(\text{aList.add}(i, \text{item})).\text{isEmpty}() = \text{false}$
 - $(\text{aList.createList()}).\text{remove}(i) = \text{error}$
 - $(\text{aList.add}(i, x)).\text{remove}(i) = \text{aList}$
 - $(\text{aList.createList()}).\text{get}(i) = \text{error}$
 - $(\text{aList.add}(i, x)).\text{get}(i) = x$
 - $\text{aList.get}(i) = (\text{aList.add}(i, x)).\text{get}(i+1)$
 - $\text{aList.get}(i+1) = (\text{aList.remove}(i)).\text{get}(i)$

Implementing ADTs

- Choosing the data structure to represent the ADT's data is a part of implementation
 - Choice of a data structure depends on
 - Details of the ADT's operations
 - Context in which the operations will be used
- Implementation details should be hidden behind a wall of ADT operations
 - A program would only be able to access the data structure using the ADT operations

Implementing ADTs

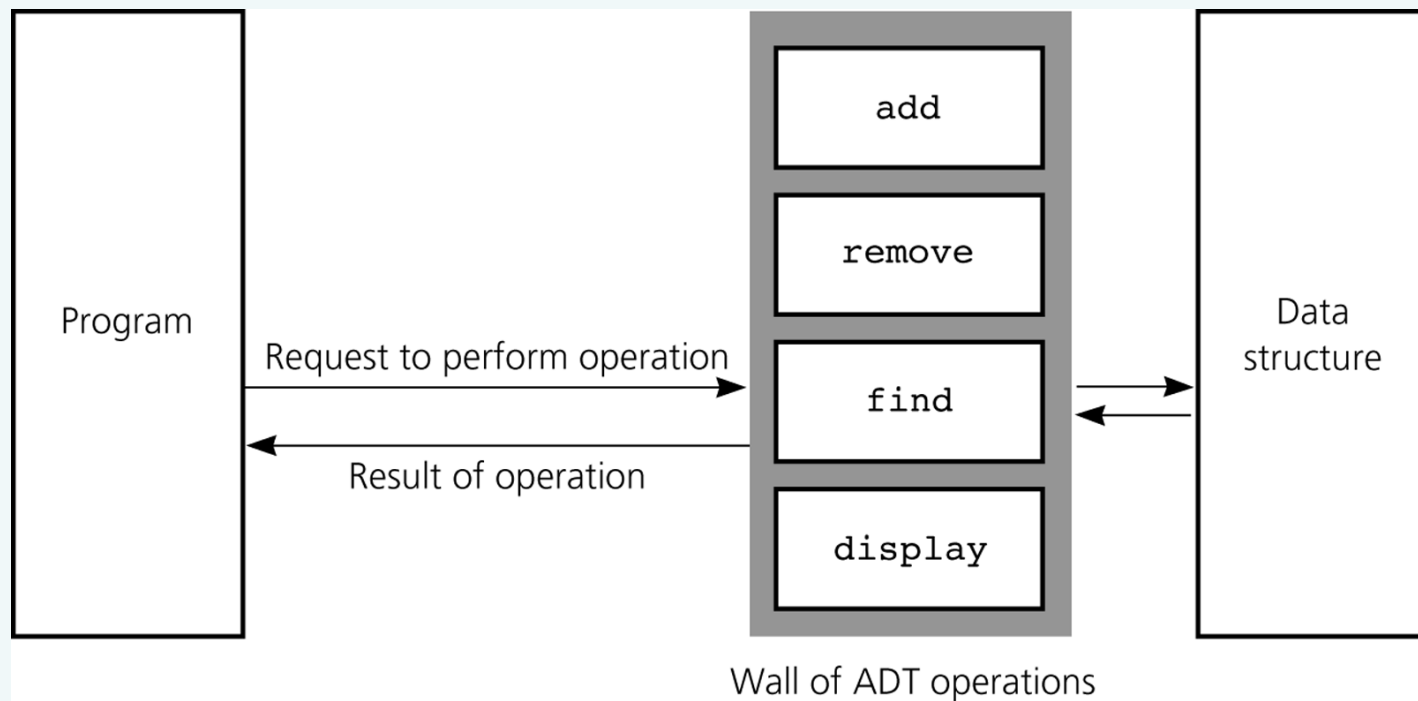


Figure 4-8

ADT operations provide access to a data structure

© 2011 Pearson Addison-Wesley. All rights reserved

4-19

Implementing ADTs

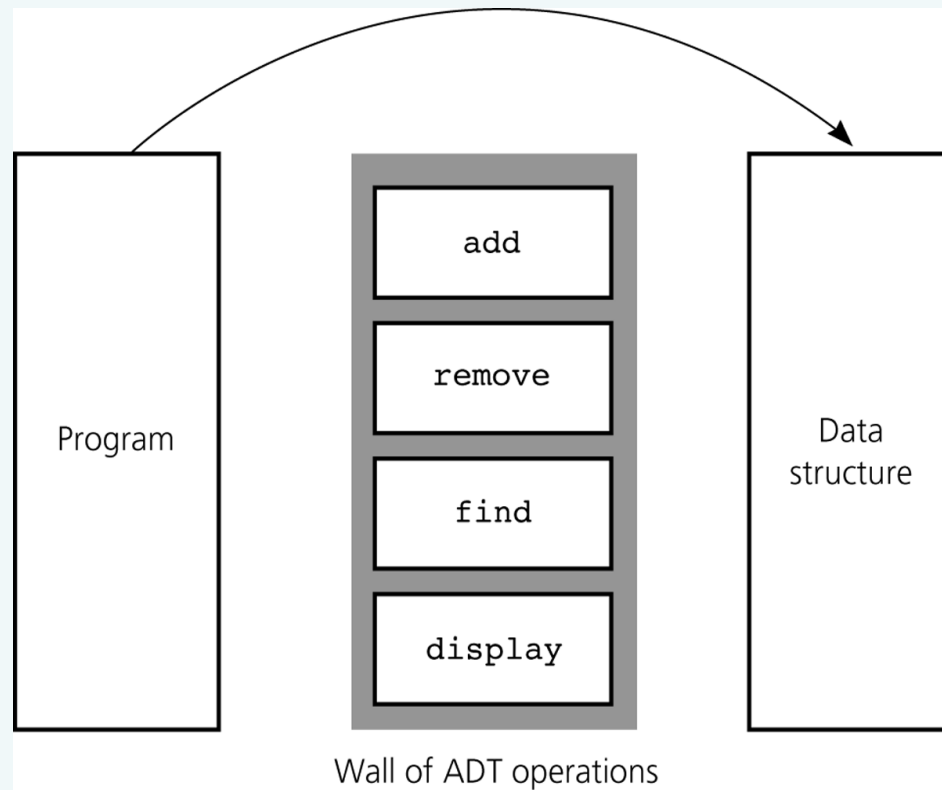


Figure 4-9

Violating the wall of ADT operations

© 2011 Pearson Addison-Wesley. All rights reserved

4-20

Java Classes Revisited

- Object-oriented programming (OOP) views a program as a collection of objects
- Encapsulation
 - A principle of OOP
 - Can be used to enforce the walls of an ADT
 - Combines an ADT's data with its method to form an object
 - Hides the implementation details of the ADT from the programmer who uses it

Java Classes Revisited

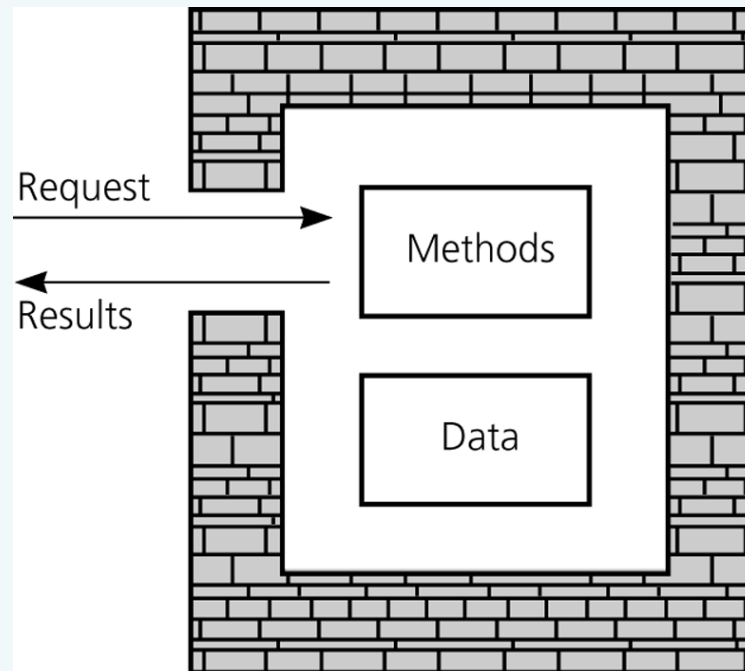


Figure 4-10

An object's data and methods are encapsulated

Java Classes Revisited

- A Java class
 - A new data type whose instances are objects
 - Class members
 - Data fields
 - Should almost always be private
 - Methods
 - All members in a class are private, unless the programmer designates them as public

Java Classes Revisited

- A Java class (Continued)
 - Constructor
 - A method that creates and initializes new instances of a class
 - Has the same name as the class
 - Has no return type
 - Java's garbage collection mechanism
 - Destroys objects that a program no longer references

Java Classes Revisited

- Constructors
 - Allocate memory for an object and can initialize the object's data
 - A class can have more than one constructor
 - Default constructor
 - Has no parameters
 - Typically, initializes data fields to values the class implementation chooses

Java Classes Revisited

- Constructors (Continued)
 - Compiler-generated default constructor
 - Generated by the compiler if no constructor is included in a class
- Client of a class
 - A program or module that uses the class

Java Classes Revisited



- Inheritance
 - Base class or superclass
 - Derived class or subclass
 - Inherits the contents of the superclass
 - Includes an `extends` clause that indicates the superclass
 - `super` keyword
 - Used in a constructor of a subclass to call the constructor of the superclass

Java Classes Revisited

- Object Equality
 - `equals` method of the `Object` class
 - Default implementation
 - Compares two objects and returns true if they are actually the same object
 - Customized implementation for a class
 - Can be used to check the values contained in two objects for equality

Java Interfaces

- An interface
 - Specifies methods and constants, but supplies no implementation details
 - Can be used to specify some desired common behavior that may be useful over many different types of objects
 - The Java API has many predefined interfaces
 - Example: `java.util.Collection`

Java Interfaces

- A class that implements an interface must
 - Include an `implements` clause
 - Provide implementations of the methods of the interface
- To define an interface
 - Use the keyword `interface` instead of `class` in the header
 - Provide only method specifications and constants in the interface definition

Java Exceptions

- Exception
 - A mechanism for handling an error during execution
 - A method indicates that an error has occurred by throwing an exception

Java Exceptions

- Catching exceptions
 - `try` block
 - A statement that might throw an exception is placed within a `try` block
 - Syntax

```
try {  
    statement(s);  
} // end try
```

Java Exceptions

- Catching exceptions (Continued)
 - catch block
 - Used to catch an exception and deal with the error condition
 - Syntax

```
catch (exceptionClass  
    identifier) {  
    statement(s);  
} // end catch
```

Java Exceptions

- Types of exceptions
 - Checked exceptions
 - Instances of classes that are subclasses of the `java.lang.Exception` class
 - Must be handled locally or explicitly thrown from the method
 - Used in situations where the method has encountered a serious problem

Java Exceptions

- Types of exceptions (Continued)
 - Runtime exceptions
 - Used in situations where the error is not considered as serious
 - Can often be prevented by fail-safe programming
 - Instances of classes that are subclasses of the `RuntimeException` class
 - Are not required to be caught locally or explicitly thrown again by the method

Java Exceptions

- Throwing exceptions
 - A `throw` statement is used to throw an exception

```
throw new exceptionClass  
(stringArgument);
```
- Defining a new exception class
 - A programmer can define a new exception class

An Array-Based Implementation of the ADT List

- An array-based implementation
 - A list's items are stored in an array `items`
 - A natural choice
 - Both an array and a list identify their items by number
 - A list's k^{th} item will be stored in `items[k-1]`

An Array-Based Implementation of the ADT List


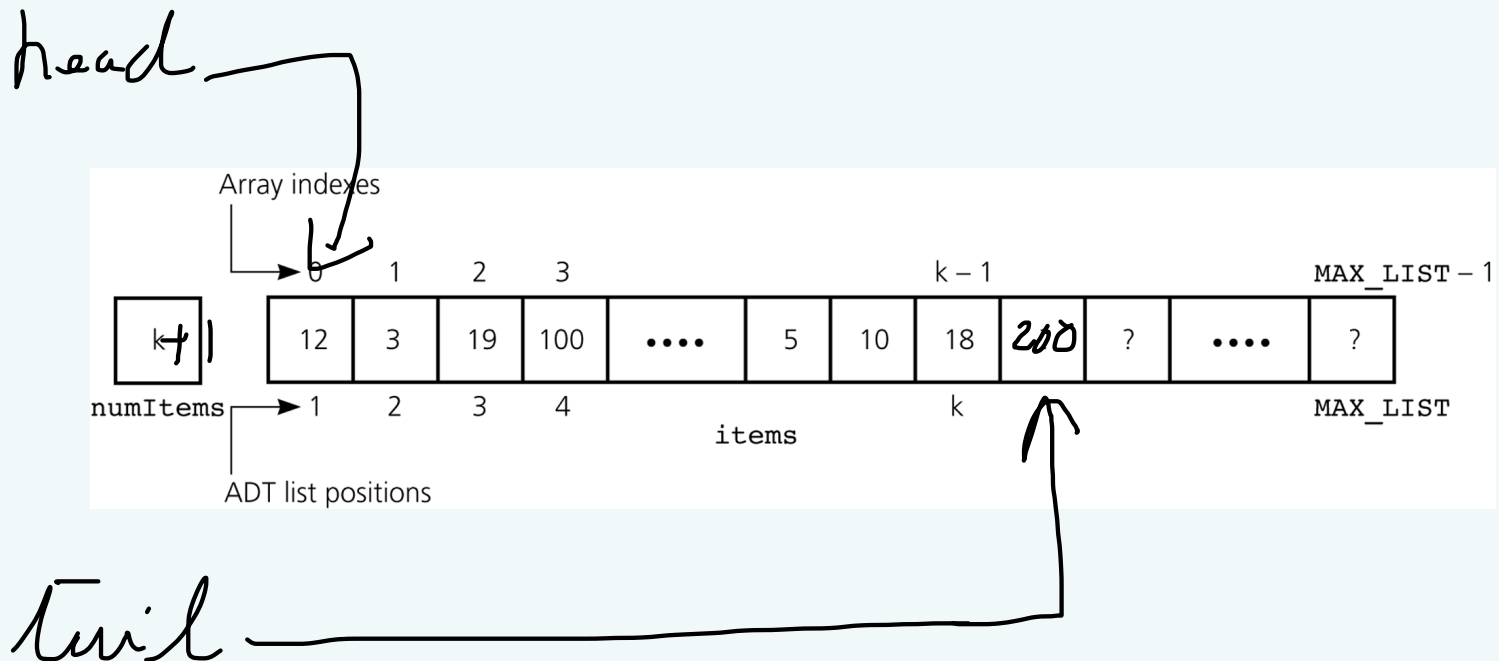


Figure 4-11

An array-based implementation of the ADT list

© 2011 Pearson Addison-Wesley. All rights reserved

4-38

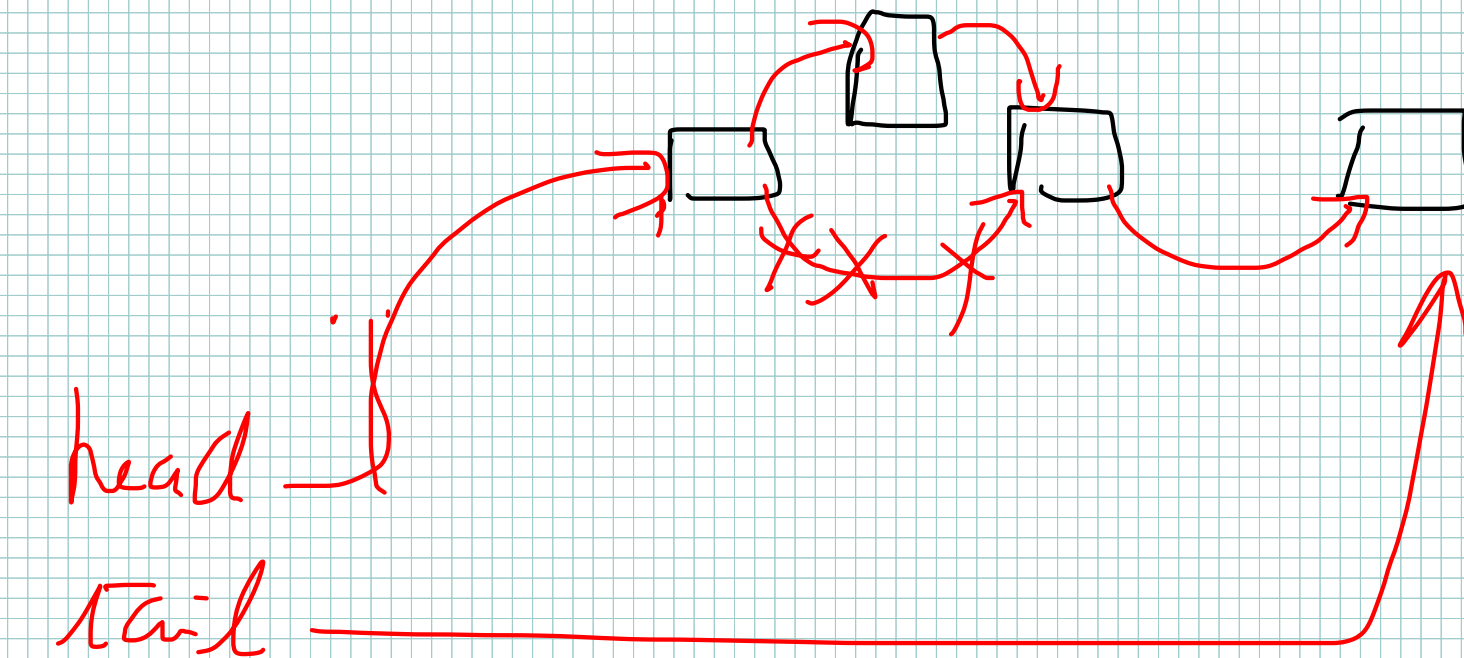

NUM 4


DATA	NEXT
ITEM	REF

LIST NODE

```

Public class ListNode {
    Private Object data;
    Private ListNode next;
    public void setData(Object o) {
        data = o;
    }
    public Object getData() {
        return data;
    }
    public void setNext(ListNode
        Ln) {
        next = Ln;
    }
    public ListNode getNext() {
        return next;
    }
}

```

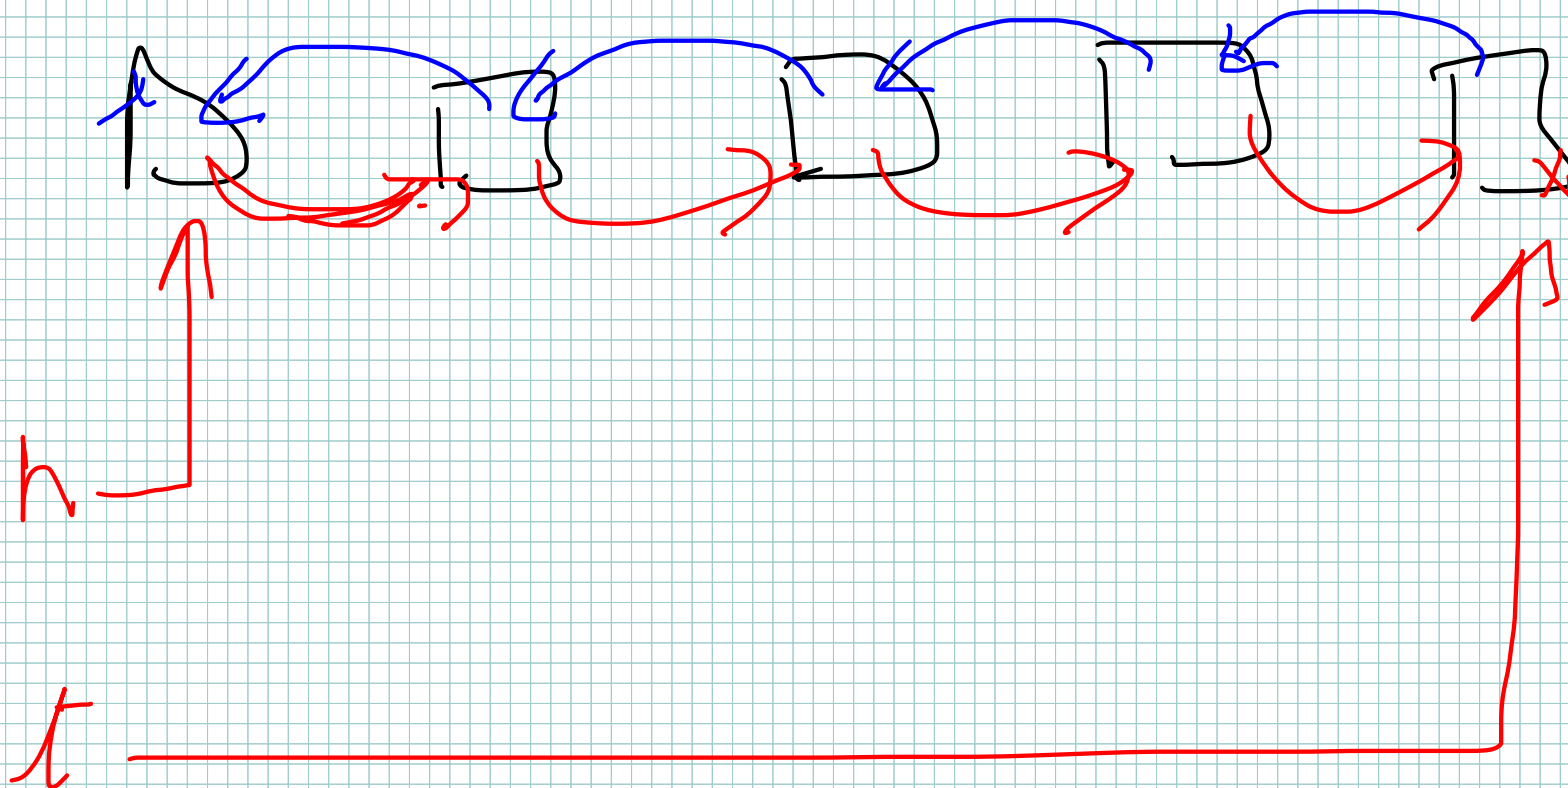

Summary

- Data abstraction: a technique for controlling the interaction between a program and its data structures
- An ADT: the specifications of a set of data management operations and the data values upon which they operate
- The formal mathematical study of ADTs uses systems of axioms to specify the behavior of ADT operations
- Only after you have fully defined an ADT should you think about how to implement it

Summary

- A client should only be able to access the data structure by using the ADT operations
- An object encapsulates both data and operations on that data
 - In Java, objects are instances of a class, which is a programmer-defined data type
- A Java class contains at least one constructor, which is an initialization method
- Typically, you should make the data fields of a class private and provide public methods to access some or all of the data fields